




Saeco Royal Support Dichtung - Seal Replacement

The seal on the support valve is highly stressed. You should always be well greased and be off and replaced at times.

Written By: VauWeh

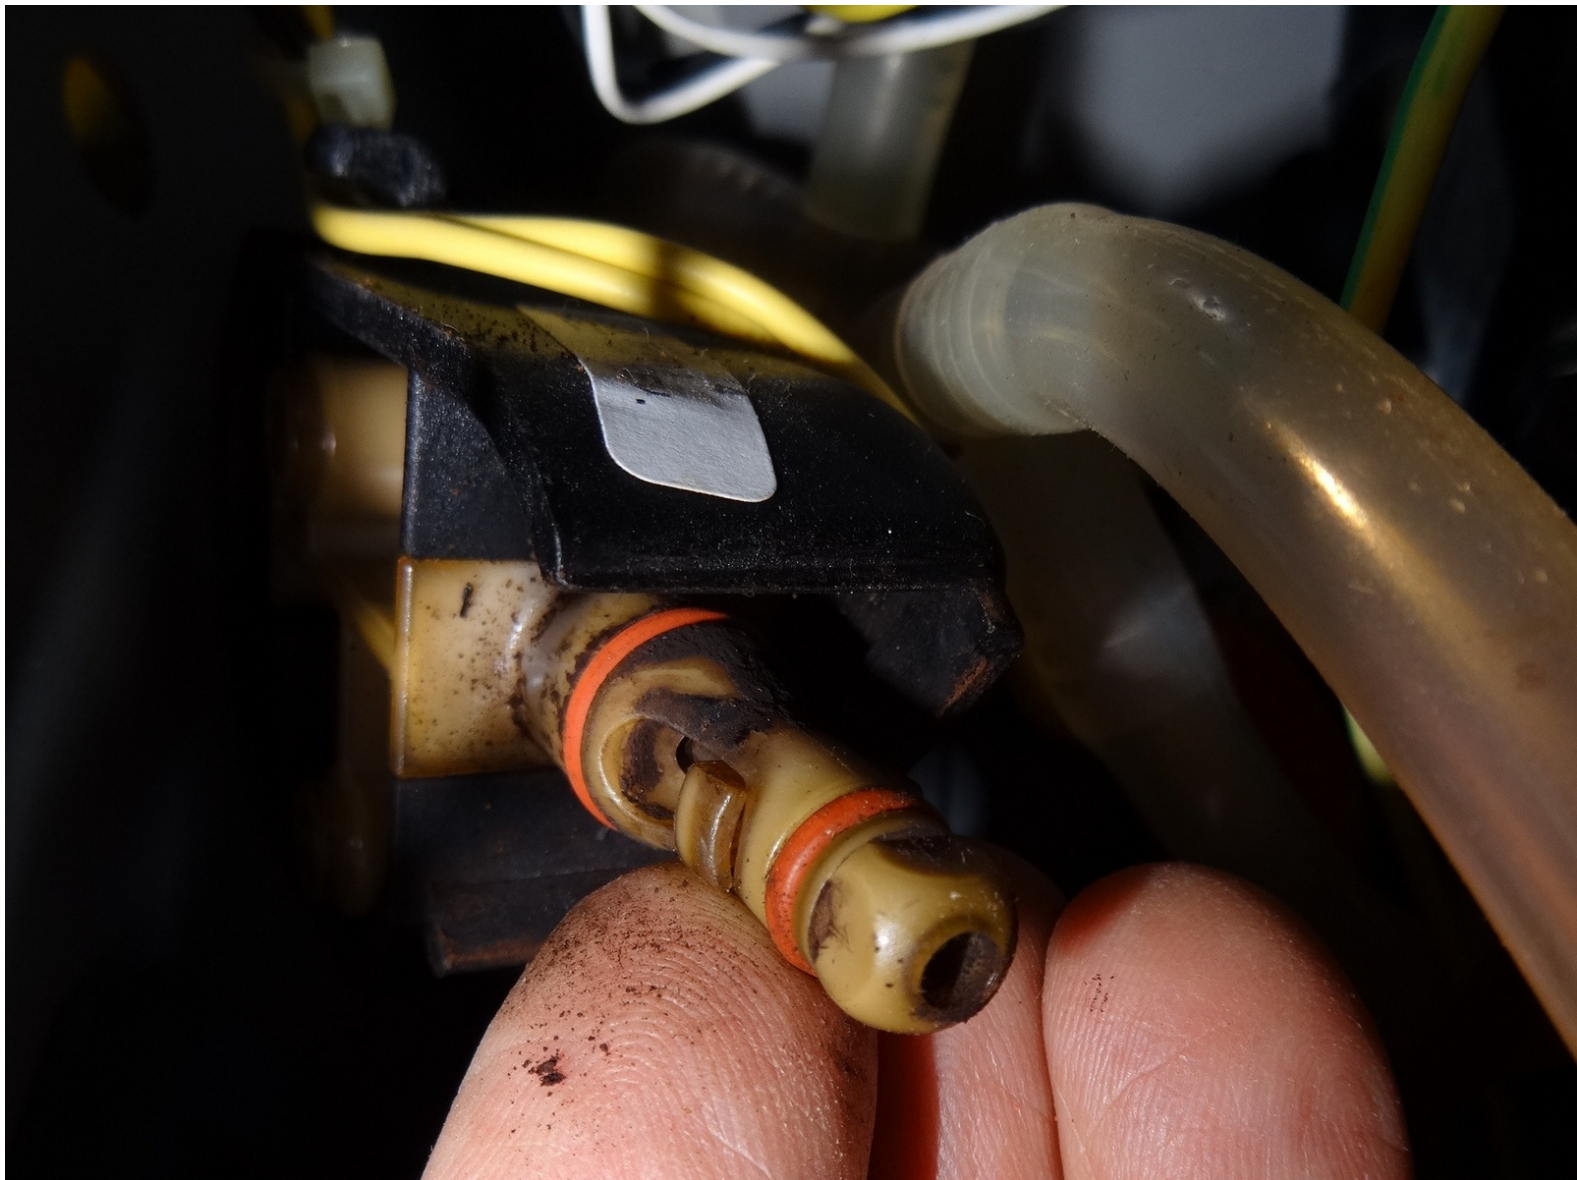



TOOLS:

- [6mm Allen Wrench - 6mm hex](#) (1)



PARTS:

- [Seals Support - Support Seal](#) (1)

Step 1 — Open



- Opening is described [here](#)

Step 2 — resolve support valve



- The Support valve is visible if you have the brewing away. It represents the connection between the hot water under pressure and the brewing unit.
- Two large screws holding the valve, 6mm allen key here. To solve.

Step 3 — Replace the seals



⚠ Danger. The small sliding piece in the valve is sensitive.

- A - cautious - Cleaning is the flavor very conducive.
- The valve is single in this model. Here are two seals are exchanged. For other models it is bolted directly on the heater. In this case is necessary to remove the heater including valve and unscrew the valve. One must then replace three seals.

Arbeite die Schritte in umgekehrter Reihenfolge ab, um dein Gerät wieder zusammenzubauen.

This document was last generated on 2017-06-19 06:46:02 AM.